

FACILITY REQUIREMENTS

It is the responsibility of the customer to meet the following requirements to ensure proper installation and operation of the Dual Station Keg Washer

Water Supply

Type	Potable tap water
Hot Water Temperature	49-63°C (120-145°F)
Supply Pressure Requirements	40-85 PSI (2.76-5.86 bar)
Flow Requirements	9.1 L/min (2 gal/min)
Maximum Operating Pressure	120 psi

Air Supply

Compressed Air	Compressor: 11-15CFM @ 100 PSI 50 – 60 PSI Operating
CO2	40-60 PSI at Source 50 PSI Operating

Electrical

North America 120Vac Model	120Vac (+/- 5%), 60Hz, 30 Amp Receptacle Full Load Amps – 8 Amps
Europe 230 Vac Model	220-240Vac (+/- 5%), 50Hz, 13 Amp Standard Duplex Receptacle Full Load Amps – 2.3 Amps

- All units include Ground Fault Interrupt (residual current device).
- It is the responsibility of the user to ensure that all electrical connections are in compliance with applicable regulatory requirements.

Drain

Piping Connection	½" Stainless steel union
Capacity	4.5 Gallons/min (20.5 lpm) minimum

Operating Conditions

Room Temperature	15-35°C (59-95°F)
Air Humidity	<80% at 25°C (77°F) decreasing linearly to <50% at 35°C (95°F)
Maximum Surface Temperature	Ambient
Altitude	<2000 Meters (218 Yards) above sea level
Water Consumption	55L per cycle
Approximate Cycle Time	5 minutes, 15 seconds

- The Dual Station Keg Washer has been designed for indoor use only.

DUAL STATION KEG WASHER




Cleaner kegs pour better beer.
Our semi-automated Dual Station Keg Washer plugs directly into a standard electrical outlet, for hassle-free thorough cleaning.

PRODUCT OVERVIEW

- Easy to use: manually loaded, PLC operated
- 14 step cleaning cycle thoroughly cleans kegs, keg sphere, and dip tube
- Rigorously validated for a perfect wash of any size keg

KEY FEATURES

- Siemens 7" Touch Screen Operation
- PLC Operated (pre-programmed)
- Dedicated detergent reservoir
- Auto-fill detergent reservoir
- Auto-drain detergent reservoir
- Peristaltic sanitizer pump and flow meter
- 304 stainless steel construction
- Bead-blast satin finish frame
- CO2 and Compressed air regulators and gauges
- Lockable stainless steel casters
- Stainless Micro Matic couplers
- Automated temperature control
- Spent detergent warning

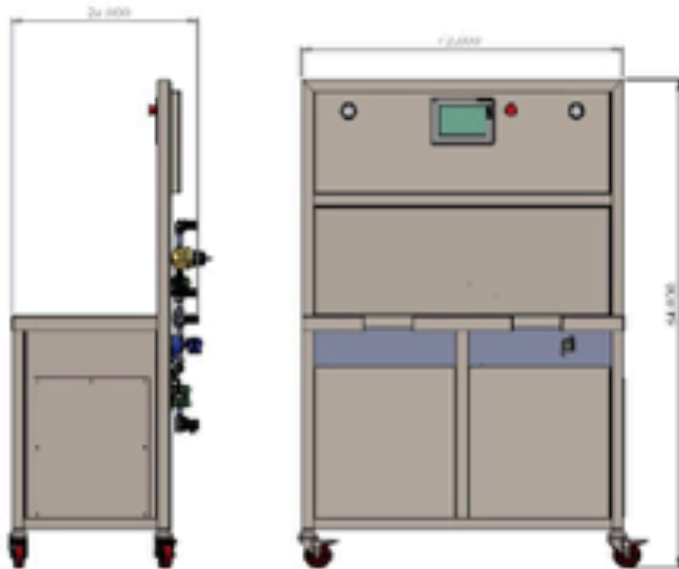

DIMENSIONS

Height	64" (162 cm)
Width	42" (106 cm)
Depth	24" (60 cm)

WEIGHT

Total Weight 400lbs (181 kg)
(packaging not included)

